



account:
03128-1085657648
Vat no:
SI81067356

ALPFRIGO d.o.o.
Obrtna cona Logatec 11a
1370 Logatec SLOVENIJA
www.alpfrigo.com
Tel.+386 40 850022
+386 40850033
+386 40 850044
+386 40 752499
+386 40 232290
Fax +386 1 4265824




CATALOGUE ALPFRIGO PRODUCTS




2011




Valid from: 01. 03. 2011




1. UPRIGHT CABINETS GN2/1




LINE 700 - 1400




	CM 700	SS	 SS	B	 B
	-2° C / +8° C	CODE 10002	CODE 10002 G	CODE 10009	CODE 10009 G
	Dim (W x D x H) 710 x 800 x 2000				

	CN 700	SS	 SS	B	 B
	-18° C / -24° C	CODE 10003	CODE 10003G	CODE 10010	CODE 10010G
	Dim (W x D x H) 710 x 800 x 2000				

	CM 700 2D	SS	 SS	B	 B
	-2° C / +8° C	CODE 10038	CODE 10038G	CODE 10041	CODE 10041G
	Dim (W x D x H) 710 x 800 x 2000				

	CN 700 2D	SS	 SS	B	 B
	-18° C / -24° C	CODE 10039	CODE 10039G	CODE 10041	CODE 10041G
	Dim (W x D x H) 710 x 800 x 2000				

	CM 700	SV	 SV	B	 B
	-2° C / +8° C	CODE 10054	CODE 10054G	CODE 10066	CODE 10066G
	Dim (W x D x H) 710 x 800 x 2000				

	CN 700	SV	 SV	B	 B
	-18° C / -24° C	CODE 10055	CODE 10055G	CODE 10067	CODE 10067G
	Dim (W x D x H) 710 x 800 x 2000				



CM / CM 700

SS

SS

B

B

SS

-2° C / +8° C

-2° C / +8° C

Dim (W x D x H)

710 x 800 x 2000

CODE

10024

CODE

10024G

CODE

10124

CODE

10124G



CM / CN 700

SS

SS

B

B

SS

-2° C / +8° C

-18° C / -22° C

Dim (W x D x H)

710 x 800 x 2000

CODE

10007

CODE

10007G

CODE

10123

CODE

10123G



CN / CN 700

SS

SS

B

B

SS

-18° C / -22° C

-18° C / -22° C

Dim (W x D x H)

710 x 800 x 2000

CODE

10093

CODE

10093G

CODE

10147

CODE

10147G



CM 1400

SS

SS

B

B

-2° C / +8° C

Dim (W x D x H)

1420 x 800 x 2000

CODE

10005

CODE

10005G

CODE

10012

CODE

10012G



CN 1400

SS

SS

B

B

-18° C / -24° C

Dim (W x D x H)

1420 x 800 x 2000

CODE

10006

CODE

10006G

CODE

10013

CODE

10013G



CM 1400

SV

SV

B

B

-2° C / +8° C

Dim (W x D x H)

1420 x 800 x 2000

CODE

10057

CODE

10057G

CODE

10069

CODE

10069G



CN 1400

SV

SV

B

B

-18° C / -24° C

Dim (W x D x H)

1420 x 800 x 2000

CODE

10058

CODE

10058G

CODE

10070





CODE

10070G

REFRIGERATED CABINETS GN2/1

TYPE	WIDTH x DEPTH x HEIGHT W x D x H	VOLUME	MASS	TEMP. RANGE	POWER INPUT	POWER SUPPLY	ENERGY CONSUMPTION	NO. OF SHELVES
<i>CM 700 SS</i>	710x800x2000	650	150	-2°/+8°	425	230/50	4.2	4
<i>CN 700 SS</i>	710x800x2000	650	162	-18°/-24°	600	230/50	10.9	4
<i>CM 1400 SS</i>	1420x800x2000	1300	230	-2°/+8°	640	230/50	5.3	8
<i>CN 1400 SS</i>	1420x800x2000	1300	245	-18°/-24°	700	230/50	14.2	8
<i>CM/CM700 SS</i>	710x800x2000	560	165	-2°/+8° -2°/+8°	540	230/50	6.2	4
<i>CM/CN 700 SS</i>	710x800x2000	560	165	-2°/+8° -18°/-22°	720	230/50	9.0	4
<i>CN/CN700SS</i>	710x800x2000	560	165	-18°/-22° -18°/-22°	850	230/50	15.2	4
<i>CM 700 SS SV</i>	710x800x2000	650	160	-2°/+8°	425	230/50	5.3	4
<i>CN 700 SS SV</i>	710x800x2000	650	170	-18°/-24°	700	230/50	14.7	4
<i>CM 1400 SS SV</i>	1420x800x2000	1300	250	-2°/+8°	530	230/50	6.1	8
<i>CN 1400 SS SV</i>	1420x800x2000	1300	270	-18°/-24°	900	230/50	17.5	8


C	700/1400	SS	SV	M	N
<i>Cabinet GN 2/1</i>	<i>MODEL</i>	<i>Stainless steel AISI 304</i>	<i>Glass door</i>	<i>Temperature</i>	<i>-2°/+8° C -18°/-24° C</i>


GREEN LINE CABINETS	TYPE 	WIDTH x DEPTH x HEIGHT W x D x H	VOLUME	MASSE	TEMP. RANGE	POWER INPUT	POWER SUPPLY	ENERGY COMSUMTION	NO. OF SHELVES
	CM 700 SS	710x800x2000	650	150	-2°/+8°	425	230/50	3.0	4
	CN 700 SS	710x800x2000	650	162	-18°/-24°	600	230/50	8.6	4
	CM 1400 SS	1420x800x2000	1300	230	-2°/+8°	640	230/50	3.5	8
	CN 1400 SS	1420x800x2000	1300	245	-18°/-24°	700	230/50	10.0	8
	CM / CM700 SS	710x800x2000	560	165	-2°/+8° -2°/+8°	540	230/50	4.5	4
	CM / CN 700 SS	710x800x2000	560	165	-2°/+8° -18°/-22°	720	230/50	7.4	4
	CN / CN700SS	710x800x2000	560	165	-18°/-22° -18°/-22°	850	230/50	12.2	4
	CM / CN 1400 SS	1420x800x2000	1200	254	-2°/+8° -18°/-22°	1025	230/50	14.2	8
	CM 700 SS SV *	710x800x2000	650	160	-2°/+8°	425	230/50	3.9	4
	CN 700 SS SV *	710x800x2000	650	170	-18°/-24°	750	230/50	13.4	4
	CM 1400 SS SV *	1420x800x2000	1300	250	-2°/+8°	530	230/50	4.6	8
	CN 1400 SS SV *	1420x800x2000	1300	270	-18°/-24°	900	230/50	15.5	8


C	700/1400	SS	SV		M	N
Cabinet GN 2/1	MODEL	Stainless steel AISI 304	Glass door	Temperature	-2°/+8°C	-18°/-24°C


* for ambient temperature 32° C


LINE 500 – 1100

	<h3 style="color: green;">CM 500</h3> <p style="color: green;">-2° C / +8° C</p> <p>Dim (W x D x H) 710 x 700 x 2000</p>	SS CODE 10552	SS CODE 10552G	B CODE 10561	B CODE 10561G
---	--	--	---	---	--

	<h3 style="color: green;">CN 500</h3> <p style="color: green;">-18° C / -24° C</p> <p>Dim (W x D x H) 710 x 700 x 2000</p>	SS CODE 10553	SS CODE 10553G	B CODE 10562	B CODE 10562G
---	--	--	---	---	--



	<h3 style="color: green;">CM 500</h3> <p style="color: green;">-2° C / +8° C</p> <p>Dim (W x D x H) 710 x 700 x 2000</p>	SV CODE 10570	SV CODE 10570G	B CODE 10576	B CODE 10576G
--	--	--	---	---	--

	<h3 style="color: green;">CN 500</h3> <p style="color: green;">-18° C / -24° C</p> <p>Dim (W x D x H) 710 x 700 x 2000</p>	SV CODE 10571	SV CODE 10571G	B CODE 10577	B CODE 10577G
---	--	--	---	---	--




CM 1100
-2° C / +8° C

Dim (W x D x H)
1420 x 700 x 2000



SS  **SS** **B**  **B**

CODE **CODE** **CODE** **CODE**
10555 **10555G** **10564** **10564G**




CN 1100
-18° C / -24° C

Dim (W x D x H)
1420 x 700 x 2000



SS  **SS** **B**  **B**

CODE **CODE** **CODE** **CODE**
10556 **10556G** **10565** **10565G**




CM 1100
-2° C / +8° C

Dim (W x D x H)
1420 x 700 x 2000



SV  **SV** **B**  **B**

CODE **CODE** **CODE** **CODE**
10573 **10573G** **10579** **10579G**












CN 1100
-18° C / -24° C

Dim (W x D x H)
1420 x 700 x 2000




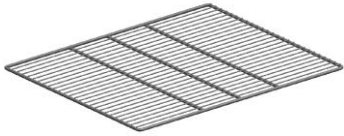
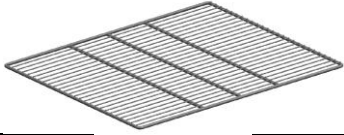


SV  **SV** **B**  **B**

CODE **CODE** **CODE** **CODE**
10574 **10574G** **10580** **10580G**

TYPE	WIDTH x DEPTH x HEIGHT W x D x H	VOLUME	MASS	TEMP. RANGE	POWER INPUT	POWER SUPPLY	ENERGY CONSUMPTION	NO. OF SHELVES
CM 500 SS	710x700x2000	450	140	-2°/+8°	425	230/50	4.2	3
CN 500 SS	710x700x2000	450	152	-18°/-24°	600	230/50	10.9	3
CM 1100 SS	1420x700x2000	1000	220	-2°/+8°	640	230/50	5.3	6
CN 1100 SS	1420x700x2000	1000	235	-18°/-24°	700	230/50	14.2	6
CM 500 SS SV *	710x700x2000	450	150	-2°/+8°	425	230/50	5.3	3
CN 500 SS SV *	710x700x2000	450	160	-18°/-24°	700	230/50	14.7	3
CM 1100 SS SV *	1420x700x2000	1000	240	-2°/+8°	530	230/50	6.1	6
CN 1100 SS SV *	1420x700x2000	1000	260	-18°/-24°	900	230/50	17.5	6

GREEN LINE CABINETS	TYPE	WIDTH x DEPTH x HEIGHT W x D x H	VOLUME	MASS	TEMP. RANGE	POWER INPUT	POWER SUPPLY	ENERGY COMSUMTION	NO. OF SHELVES
									
	CM 500 SS	710x700x2000	450	140	-2°/+8°	425	230/50	3.0	3
	CN 500 SS	710x700x2000	450	152	-18°/-24°	600	230/50	8.6	3
	CM 1100SS	1420x700x2000	1000	220	-2°/+8°	640	230/50	3.5	6
	CN 1100 SS	1420x700x2000	1000	235	-18°/-24°	700	230/50	10.0	6
	CM 500 SS SV *	710x700x2000	450	150	-2°/+8°	425	230/50	3.9	3
	CN 500 SS SV *	710x700x2000	450	160	-18°/-24°	750	230/50	13.4	3
	CM 1100 SS SV *	1420x700x2000	1000	240	-2°/+8°	530	230/50	4.6	6
	CN 1100 SS SV *	1420x700x2000	1000	260	-18°/-24°	900	230/50	15.5	6

OPTIONS:

	GN SUPPORT 20202	
	GN SUPPORT 2T 20208	
	GN SUPPORT /model 500,1100/ 20259	
	PVC 20301	SS 20306
	PVC /model 500,1100/ 20300	
	20318 - 20317 (2x with 2 x without brake)	
	AIR FILTER 40219	

LEGEND:

C	cabinet GN 2/1
M	temperature range -2° C / +8° C
N	temperature range -18° C / -24° C
CM / CM ; CM / CN ; CN / CN 700/1400 ; 500/1100	two temperat cabinet -2° C/+8° C/-18° C/-22° C volume liters
SS	stainless steel AISI 304 outside and inside
B	white outside, stainless steel AISI 304 inside
SV	glass door

2. BAKERY CABINETS LINE 600 - 900



BKS 600

-3° C / +10° C

Dim (W x D x H)
780 x 680 x 2000

CODE
10301


10301G



BKS 900

-3° C / +10° C

Dim (W x D x H)
780 x 960 x 200

CODE
10303


10303G



BLF 600

-5° C / -24° C

Dim (W x D x H)
780 x 680 x 2000

CODE
10302


10302G



BLF 900





-5° C / -24° C

Dim (W x D x H)
780 x 960 x 2000

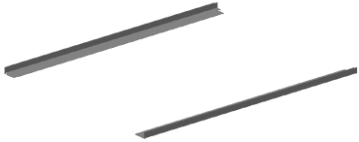

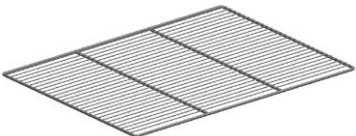


CODE
10304


10304G



TYPE	WIDTH x DEPTH x HEIGHT W x D x H	VOLUME	MASS	TEMP. RANGE	POWER INPUT	POWER SUPPLY	ENERGY CONSUMPTION	NO. OF «L» PROFILES
<i>BKS 600</i>	780x680x2000	550	140	-3°/+10°	425	230/50	4.2	20
<i>BLF 600</i>	780x680x2000	550	150	-5°/-24°	600	230/50	10.9	20
<i>BKS 900</i>	780x960x2000	750	170	-3°/+10°	640	230/50	4.6	20
<i>BLF 900</i>	780x960x2000	750	180	-5°/-24°	700	230/50	11.2	20

GREEN LINE CABINETS	TYPE	WIDTH x DEPTH x HEIGHT W x D x H	VOLUME	MASS	TEMP. RANGE	POWER INPUT	POWER SUPPLY	ENERGY COMSUMTION	NO. OF «L» PROFILES
	<i>BKS 600</i>	780x680x2000	550	140	-3°/+10°	425	230/50	2.9	20
	<i>BLF 600</i>	780x680x2000	550	150	-5°/-24°	600	230/50	8.2	20
	<i>BKS 900</i>	780x960x2000	750	170	-3°/+10°	640	230/50	3.2	20
	<i>BLF 900</i>	780x960x2000	750	180	-5°/-24°	661	230/50	9.1	20


OPTIONS:

	<p>GN SUPPORT 900 20224</p>
	<p>GN SUPPORT 600 20223</p>
	<p>PVC 20301</p>
	<p>1 kpl. 20318 - 20317 (2x without and 2 x with brake)</p>
	<p>AIR FILTER 40219</p>

3. FISH CABINETS

	CMF 600 SS	CODE 10139	 10139G
	-4° C / +6° C 12 kaset 600x400x70 Dim (W x D x H) 780 x 680 x 2000		

TYPE	WIDTH x DEPTH x HEIGHT W x D x H	VOLUME	MASS	TEMP. RANGE	POWER INPUT	POWER SUPPLY	ENERGY CONSUMPTION	NO. OF PVS CASES
CMF 600	780x680x2000	550	140	-4°/+6°	425	230/50	4.2	12

GREEN LINE CABINETS	TYPE	WIDTH x DEPTH x HEIGHT W x D x H	VOLUME	MASS	TEMP. RANGE	POWER INPUT	POWER SUPPLY	ENERGY COMSUMTION	NO. OF PVS CASES
		CMF 600	780x680x2000	550	140	-4°/+6°	425	230/50	3.1

4. ICE CREAM CABINETD



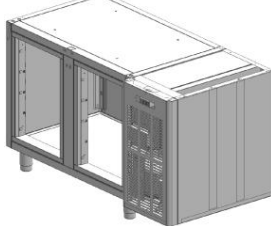

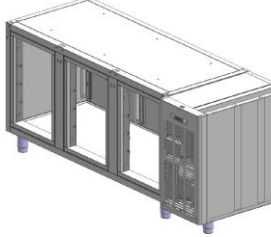

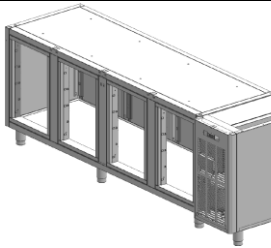

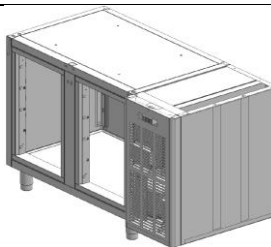

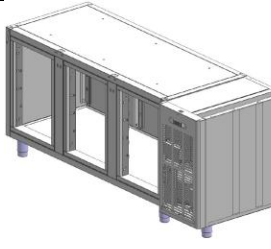

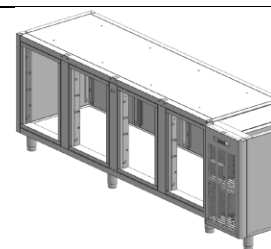

BLF 900 EC

-18° C / -30° C
8 PVC shelves 800x600
Dim (W x D x H)
780 x 960 x 2000





CODE
10319



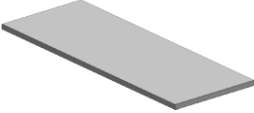
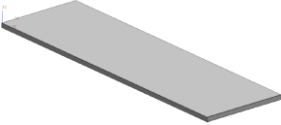


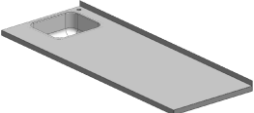
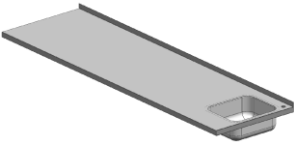

10319 G

5. COUNTERS GN 1/1


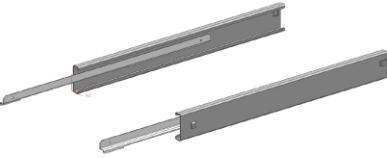




	<p>TM 2 -2° C/+8° C</p> <p>Dim (L x G x H) 1380 x 700 x 850</p>	<p>WITH COOLING UNIT</p> <p>20087</p>	<p>WITHOUT COOLING UNIT</p> <p>20084</p>	 <p>20087G</p>
	<p>TM 3 -2° C/+8° C</p> <p>Dim (L x G x H) 1880 x 700 x 850</p>	<p>WITH COOLING UNIT</p> <p>20088</p>	<p>WITHOUT COOLING UNIT</p> <p>20085</p>	 <p>20088G</p>
	<p>TM 4 -2° C/+8° C</p> <p>Dim (L x G x H) 2380 x 700 x 850</p>	<p>WITH COOLIN G UNIT</p> <p>20089</p>	<p>WITHOUT COOLING UNIT</p> <p>20086</p>	 <p>20089G</p>
	<p>TN 2 -18° C / -24° C</p> <p>Dim (L x G x H) 1380 x 700 x 850</p>	<p>WITH COOLING UNIT</p> <p>20090</p>	<p>WITHOUT COOLING UNIT</p> <p>20056</p>	 <p>20090G</p>
	<p>TN 3 -18° C / -24° C</p> <p>Dim (L x G x H) 1880 x 700 x 850</p>	<p>WITH COOLING UNIT</p> <p>20091</p>	<p>WITHOUT COOLING UNIT</p> <p>20057</p>	 <p>20091G</p>
	<p>TN 4 -18° C / -24° C</p> <p>Dim (L x G x H) 2380 x 700 x 850</p>	<p>WITHOUT COOLING UNIT</p> <p>20058</p>	<p>WITH COOLING UNIT</p> <p>20092</p>	 <p>20092G</p>

BOX WITHOUT COOLING UNIT: box is without legs, without working table, with build in hole for sink with previous arrangement, with build in leg supporters, box is without embalage. Box allows montage of cooling unit on left or right, but with previous arrangement.

	MODUL DOOR	CODE
		30113
	MODUL 2 DRAWERS	CODE
		30108
	MODUL 3 DRAWERS	CODE
		30109
	MODUL 2/3 - 1/3 DRAWERS	CODE
		30147

	WORKING TABLE TM / TN 1	CODE 20184
	WORKING TABLE TM / TN 2	CODE 20081
	WORKING TABLE TM / TN 3	CODE 20082
	WORKING TABLE TM / TN 4	CODE 20083
	WORKING TABLE WITH SINK TM / TN 1 300x400x165	CODE 20185
	WORKING TABLE WITH SINK TM / TN 2 300x400x165	CODE 20096
	WORKING TABLE WITH SINK TM / TN 3 300x400x165	CODE 20097
	WORKING TABLE WITH SINK TM / TN 4 300x400x165	CODE 20098

OPTIONS:








	GN SUPPORT 20241	
	TELESKOPIC GUIDS Zn/rf 30101	
	PVC 20327	SS 20331
	20318 - 20317 (2x without and 2 x with brake))	
	LOCK	
	RIGHT 30133	LEFT 30134
	AIR FILTER 40223	

 **GREEN LINE**

T - M - 3 - 1 - 2 - 3 - 4 - AL - P
(1) - (2) - (3) - (4) - (4) - (4) - (4) - (5) - (6)



1	2	3	4	5	6
T TABLE	M -2° C / +8° C N -18° C / -24° C	NO. OF DOORS	1- SET DOOR 2- SET DOUBLE DRAW. 3- SET THREE DRAW. 4- SET 1/3 – 2/3 DRAW	AL - LEFT COOLING AD – RIGHT COOLING ARU -REMOTE UNIT BA - WITHOUT COOLING UNIT	P – WITH WORK. TAB. BP – WITHOUT W. TAB. PKS – WORKING TAB., 40mm SPLASH EDGE SINK DIM. 300x400x165



TYPE MODEL	HEIGHT x DEPTH x HEIGHT W x D x H	VOLUME	MASS	TEMP. RANGE	POWER INPUT	POWER SUPPLY	ENERGY CONSUMPTION
<i>TM 2</i>	850x700x1380	265	100	-2°/+8°	350	230/50	3.2
<i>TN 2</i>	850x700x1380	265	110	-18°/-24°	400	230/50	8.8
<i>TM 3</i>	850x700x1880	420	120	-2°/+8°	450	230/50	4.2
<i>TN 3</i>	850x700x1880	420	130	-18°/-24°	580	230/50	10.9
<i>TM 4</i>	850x700x2380	575	150	-2°/+8°	560	230/50	5.6
<i>TN 4</i>	850x700x2380	575	160	-18°/-24°	720	230/50	12.2

GREEN LINE COUNTERS	TYPE MODEL	HEIGHT x DEPTH x HEIGHT W x D x H	VOLUME	MASSE	TEMP. RANGE	POWER INPUT	POWER SUPPLY	ENERGY COMSUMTION
								
	<i>TM 2</i>	850x661x1380	265	100	-2°/+8°	350	230/50	1.8
	<i>TN 2</i>	850x661x1380	265	110	-18°/-24°	400	230/50	6.7
	<i>TM 3</i>	850x661x1880	420	120	-2°/+8°	450	230/50	2.2
	<i>TN 3</i>	850x661x1880	420	130	-18°/-24°	580	230/50	7.7
	<i>TM 4</i>	850x661x2380	575	150	-2°/+8°	450	230/50	3.1
	<i>TN 4</i>	850x661x2380	575	160	-18°/-24°	720	230/50	8.5



6. SPECIAL CABINETS

CONDENSATION DRYERS



	CFD700 SS	CODE 10601	 10601G
	Dim (W x D x H) 780 x 680 x 2000 11 shelves		

	CFD 350 SS	CODE 10602	 10602G
	Dim (W x D x H) 780 x 960 x 200 6 shelves		

CAMP CABINETS

	CM 700 KAMP SS	CODE 10148	 10148G
	Dim (W x D x H) 780 x 680 x 2000		

PASS-THROUGH CABINET

	CM 700 PRSV SS	CODE 10149	 10149G
	Dim (W x D x H) 780 x 680 x 2000		

<i>TYPE</i>		<i>WIDTH x DEPTH x HEIGHT</i>	<i>VOLUME</i>	<i>MASS</i>	<i>TEMP. RANGE</i>	<i>POWER INPUT</i>	<i>POWER SUPPLY</i>	<i>ENERGY CONSUMPTION</i>	<i>NO. OF SHELVES</i>
<i>CONDENSATION DRYERS</i>	<i>CFD 350 SS</i>	710x800x2000	300	120	+40°/+50°	550	230/50	12	6
<i>CONDENSATION DRYERS</i>	<i>CFD 700 SS</i>	710x800x2000	650	150	+40°/+50°	650	230/50	15	11
<i>CAMP CABINET</i>	<i>CM 700 KAMP SS</i>	710x800x2000	650	162	-2°/+8°	400	230/50	4.2	10
<i>PASS-THROUGH CABINET</i>	<i>CM 700 PR SVSS</i>	710x800x2000	650	162	-2°/+8°	400	230/50	5.3	4

7. CHILLERS AND FREEZERS GN1/1



CC 35

6 slides for GN1/1
Cooling capacity 25kg

CODE
10501



CF 35

6 slides for GN1/1
freezing capacity 15kg

CODE
10502



CC 50

15 slides for GN1/1
Cooling capacity 50kg

CODE
10503



CF 50

15 slides for GN1/1
freezing capacity 30kg

CODE
10504

-stainless steel AISI 304
-self closing doors
-electronic regulation
-chiller-freezer combination
-UV light
-working at 43° C ambient temperature

OPTIONS:
-extra guides
-castors
-GN posoda
-extra plate